


# OWX-50

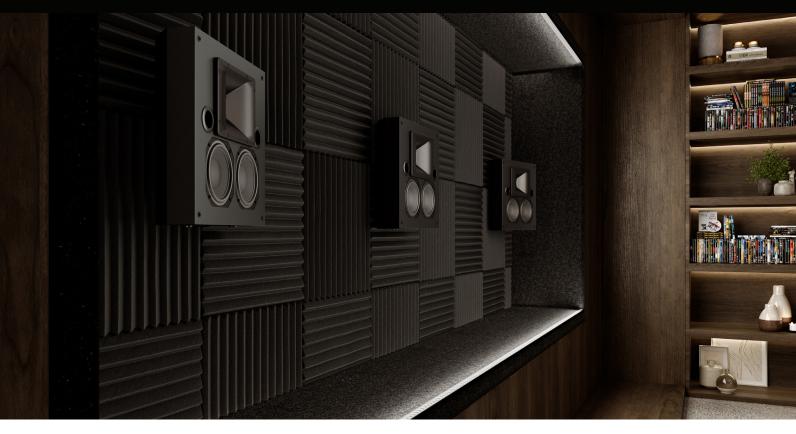

# COMPACT, YET POWERFUL

The OWX-50 on-wall speaker offers performance and power in a compact design. Seamlessly integrating into any home cinema, the OWX-50 is the perfect choice for those who require high output from a small footprint.

A constant directivity horn and compression driver cleverly sit within the sleek and unobtrusive profile, while the squareshaped baffle allows extensive placement options with screen subwoofers.

With extensive output, dynamic range and consistent dispersion, the OWX-5O can be used as a screen, surround or overhead speaker, offering the benefit of positional flexibility without sacrificing performance.



OWX-50 front without grille



OWX-50 back with bracket

Adjustable bracket

Using the included bracket, the OWX-50 can be mounted flush against the wall or at adjustable angles up to 30 degrees for optimal sound dispersion. Grille is included!



### **High performance**

A Krix constant directivity horn and compression driver deliver ultraconsistent dispersion and high output.



## Compact design

A sleek, compact and spacesaving design that blends aesthetics with functionality, complete with an included grille.





### Australian made


Krix has proudly engineered and manufactured speakers in Australia since 1974.




# DIMENSIONS







Bracket



115

VIEW

#### OWX - 50

PERFORMANCE	
Frequency range	60 Hz - 20 kHz (in room response)
Power handling	50 - 500 Watts RMS recommended amplifier
	power
Sensitivity	97 dB (2.83V / 1m)
Impedance	4 Ohms
Configuration	2-way
Crossover point	1.9 kHz
DRIVERS	
DRIVERS Low frequency driver	Dual 165mm (6 1/2") paper cone driver. 50mm
	Dual 165mm (6 1/2") paper cone driver. 50mm (2") voice coil wound on high powered kapton
	(2") voice coil wound on high powered kapton
	(2") voice coil wound on high powered kapton former, with ventilated spider and aluminium flux
	(2") voice coil wound on high powered kapton former, with ventilated spider and aluminium flux
Low frequency driver	(2") voice coil wound on high powered kapton former, with ventilated spider and aluminium flux stabilisation ring for low distortion.

ENCLOSURE AND TERMINALS	
Enclosure type	Bass reflex, front vented
Input terminals	Nickel plated spring terminals featuring a 5mm hole to accept up to 10AWG cable
Grille included	Yes
DIMENSIONS	
Including grille	440mm high x 440mm wide x 159mm deep
Including bracket	447mm high x 440mm wide x 169mm deep
WEICHT	
WEIGHT	
OWX-50 with grille	14.4 kg

1.7 kg