



WN120

Polyethylene

OUTDOOR 360° SUBWOOFER

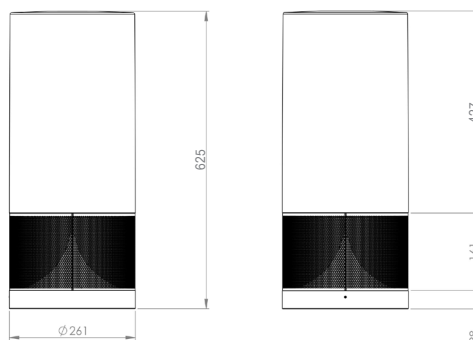

Loudspeaker (4 Ω)



Loudspeaker + Led White



Loudspeaker + Led RGB



Line transformer G-Former™

- Green
- Gray
- Anthracite
- White
- Corten effect

WN120V	WN120V-W	WN120V-R
WN120Y	WN120Y-W	WN120Y-R
WN120A	WN120A-W	WN120A-R
WN120B	WN120B-W	WN120B-R
WN120Z	WN120Z-W	WN120Z-R

Code: **TRT055**

Material	Technopolymer
Type	Subwoofer Pneumatic suspension
Loudspeaker Ø (cm)	1x Woofer 20,0 cm high excursion
Power RMS (W)	200
Max Power (W)	400
Frequency response (Hz)	42 - 150
Sensitivity dB (2,83V/1m)	91
Nominal impedance (Ω)	4
International Protection IP	35
Temperature range (°C)	-20 / +80
Dimensions H x W x D (cm)	62,5 x 26,0 x 26,0
Weight (Kg)	9,00

Nominal power (W)	50
-------------------	----

Input voltage (V) 70 / 100

Frequency response (Hz)	40 - 21K
-------------------------	----------

Output power on 8 Ω (W) 50,0-37,5-25,0

Dimensions H x W x D (cm)	7,2 x 7,2 x 3,8
---------------------------	-----------------

Weight (Kg) 0,41

The TRT055 is a 70V / 100V toroidal transformer specifically designed for outdoor use.

Ground anti-theft kit



Code **HRX031**

Dimensions H x W x D (cm) 33,0 x 15,0 x 10,0





Marine Speaker



WN120EA

Cement

OUTDOOR 360° SUBWOOFER

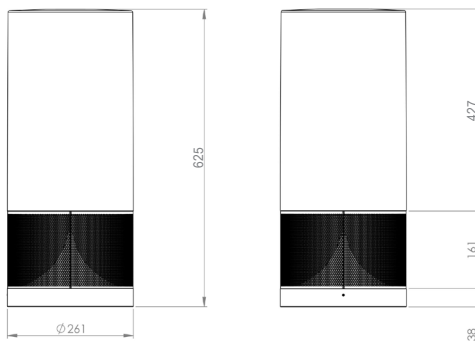

Loudspeaker (4 Ω)



Loudspeaker + Led White



Loudspeaker + Led RGB



Line transformer G-Former™

Cement Grey



WN120EA

WN120EA-W

WN120EA-R

Code: TRT055

Material	Cement
Type	Subwoofer Pneumatic suspension
Loudspeaker Ø (cm)	1x Woofer 20,0 cm high excursion
Power RMS (W)	200
Max Power (W)	400
Frequency response (Hz)	42 - 150
Sensitivity dB (2,83V/1m)	91
Nominal impedance (Ω)	4
International Protection IP	35
Temperature range (°C)	-20 / +80
Dimensions H x W x D (cm)	62,5 x 26,0 x 26,0
Weight (Kg)	30,10

Nominal power (W)	50
-------------------	----

Input voltage (V) 70 / 100

Frequency response (Hz)	40 - 21K
-------------------------	----------

Output power on 8 Ω (W) 50,0-37,5-25,0

Dimensions H x W x D (cm)	7,2 x 7,2 x 3,8
---------------------------	-----------------

Weight (Kg) 0,41

The TRT055 is a 70V / 100V toroidal transformer specifically designed for outdoor use.

Ground anti-theft kit



Code HRX031


Dimensions H x W x D (cm) 33,0 x 15,0 x 10,0



Marine Speaker

	White LED	RGB LED
Power supply	24 V	24 V
Power	8,5 W	12 W
Dimmable	√	√
Led colour temperature	3000 K	Red - Green - Blue
Emission angle	120°	120°
Operating temperature	-20 °C (min) +45 °C (max)	-20 °C (min) +45 °C (max)

WHITE LED wiring diagram

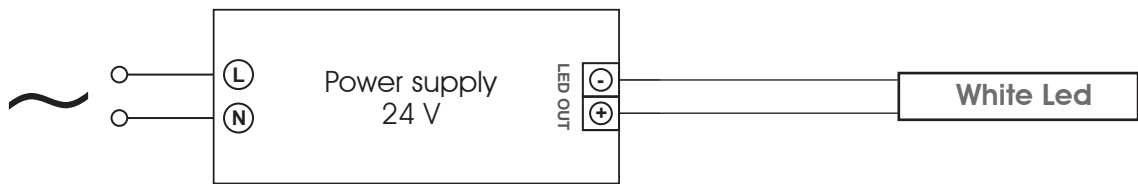

RGB LED wiring diagram

