

# SUB 15

Passive  
subwoofer




Subwoofer line serves as an ultimate low frequency reinforcement range that represents all-purpose solutions, capable of fitting into the specific demands of any and all innovative projects.

Passive and powered cabinets are ready for mobile applications, as well as permanent installations, concerts and touring.

Low-frequency passive loudspeaker, based on own-produced reliable long-excursion 15" woofer, is capable of delivering 139 dB max SPL. Designed specifically to reinforce MAG Audio full-range cabinets, Sub 15 is a great combination of performance and weight for mobile sound professionals to benefit from.



## DIMENSIONS

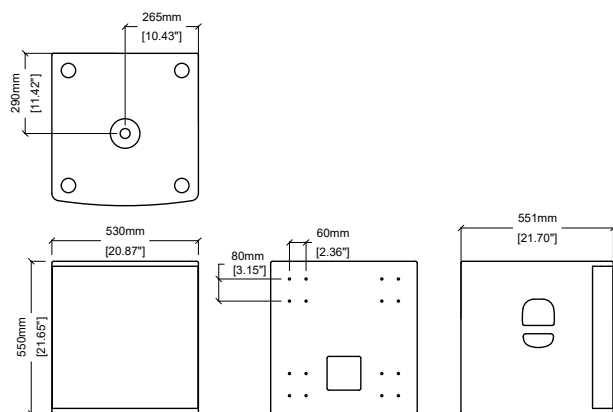

## SPECIFICATIONS

Frequency Response (-10dB)	37 - 300 Hz
Peak SPL <sup>1</sup>	139 dB
Sensitivity (1W/1m)	97 dB
LF Driver	15", 4" VC
Impedance	4 / 8 Ohm
Nominal power <sup>2</sup>	1000 W
Connectors	2 x Neutrik Speakon
Dimensions (W x H x D)	530 x 560 x 551 mm
Weight (Net/Shipping)	37 kg / 40 kg
Mounting	M20 distance pole adapter 4 x 4 M10 mounting on wheels
Enclosure material	Plywood, wear-resistant paint
Speaker protection	Steel grill, acoustically transparent backing

<sup>1</sup> - pink noise, filtered according to AES 2 - 2012, crest factor 12 dB

<sup>2</sup> - based on transducer power measured according to AES 2 - 2012

## SAFETY INSTRUCTIONS

1. Do not pour liquids on speaker system - this may cause driver cone destruction and unappealing speaker appearance. Do not allow direct sunlight on speaker cone in order to prevent premature failure. Do not install speaker system near open flames or heating elements.
2. Do not use speaker system with damaged speakON or speaker cable so as not to cause electric shock hazard or fire hazard.
3. Make sure speaker system is firmly set up on the floor, stage, or wall (where applicable).
4. While setting speaker system up onto an angled or slippery surface, make the necessary arrangements to avoid vibration-induced movement.
5. Speaker system is capable of delivering significant sound pressure levels. To avoid permanent or temporary hearing damage, prolonged exposure to sound pressure levels exceeding 90 dB should be limited.

## CONNECTIONS


Use Hi-pass filter to prevent speaker damage and distorted sound by eliminating low non-audible frequencies in input signal.

Do not exceed input power ratings mentioned in specifications while exploiting the speaker system.

Speaker system comes with two Neutrik® Speakon heavy duty sockets for easy connection.

Signal +	1 +
Signal -	1 -
High pass filter:	
Freq, no less than	35 Hz
Order, no less than	18 dB/oct
Recommended amplifier power	1000 - 2000 W on nominal impedance

## ACCESSORIES



### Mounting on wheels

WH-0990

WH-0985